

Emergency Telephones

100% Australian Owned

www.emergencytelephones.com.au

Weatherproof Telephone

MODEL: **ETSP-01**

WEATHERPROOF



Main features:

1. Robust rust proof aluminium casing
2. 12 button keypad
3. Vandal, dust & waterproof
4. Auto dial, pickup handset & call is made
5. Magnetic reed hook switch
6. Lightning protection to ITU-K21
7. Noise cancelling microphone
8. Armoured corded handset cable
9. Can be used as a normal phone but also has a programmable speed dial feature

Applicable to:

- As a Public Telephone
- Indoor or Outdoor
- Mines or Tunnels
- Railway Stations
- Taxi or Bus Stands
- Ports or Docks

Options:

- Door or no door
- Indoor or outdoor
- Analogue or VoIP
- Steel or waterproof rubbered keypad



RoHS



N30788

Sales and Service:



Emergency Telephones


PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au

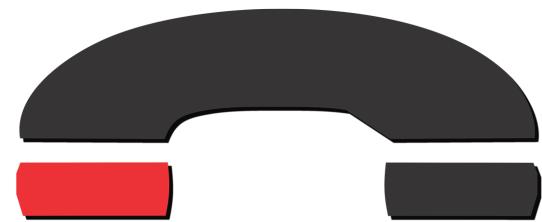

Emergency Telephones



100% Australian Owned

www.emergencytelephones.com.au

This weatherproof phone is designed for railway stations, metro, tunnels, etc. Housed in robust aluminum die case with a spring loaded door, it offers protection against the outdoor environment, vandal resistance and rust proof. The unit meets all the latest Australian, European and UK standards for EMC and US FCC, telephony, waterproofing and lightning protection and thus offers the level of performance and reliability demanded in such an environment.



3 colors are available
Blue Yellow Red

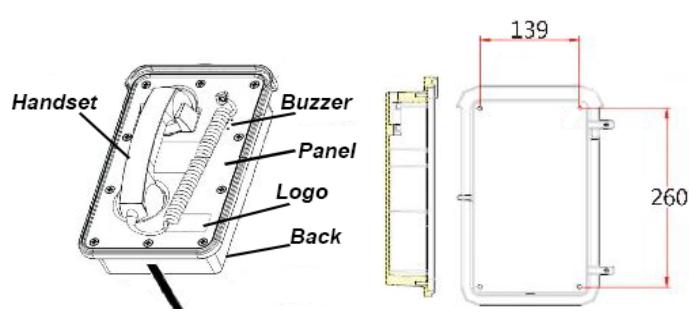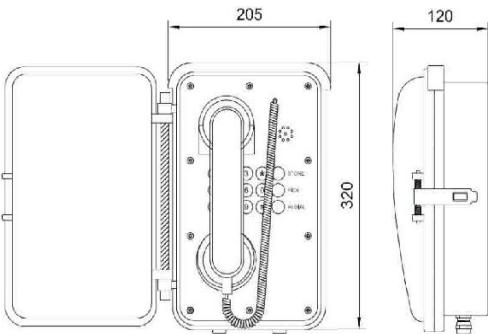

Standard and SMART Analogue and VoIP-SIP options available DTMF (Dual Tone Multi Frequency)
Compatible with most PABX, PBX and PAX systems.

Main Product Features

1. Robust rust proof aluminium casing.
2. Full keypad with memory, 10 button or 4 button programmable speed-dial telephone, Illuminated button optional.
3. Door cover: orient automatically and self closing.
4. Weatherproof standard, service temperature range from: 0°C to +75°C.
5. Magnetic reed hook-switch.
6. Telephone line powered. No external power or battery backup required.
7. Lightning protection to ITU-T recommendation K.21.
8. Handset: made from special engineering plastic, high anti-knock resistance, weatherproof, armoured cable.
9. Hearing Aid compatible receiver, noise cancelling microphone.
10. Handset integrity wiring to enable the telephone system to check if the telephone unit is still operational.
11. Selectable 7 minute time out, to release the line if the handset is left off hook.
12. Vandal resistant and tamper resistant hardware.
13. Easy installation / replacement.

Main PCB

1. Well treated PCB used inside the phone.
2. Robust screw terminals used for the connection of the ringer, handset, line in and hook switch.
3. Selectable 7 minute time out, to release the line if the handset is left off hook.
4. All connectors are greased in production.

Handset

1. Kirk electro dynamic transducer for both handset transmitter and receiver.
2. Spring cable or armored cable attach the handset to the telephone main unit.
3. Stainless steel cable connects to the exchange.
4. Inductive coupler fitted for hearing aid compatibility.
5. Handset integrity wiring to enable exchange to check if the phone is still operational.

VOICE OVER IP-SIP (version)

Connection type: RJ45 Socket inside sealed enclosure

Power supply: External 5V dc Call set-up Protocol:

Session Initiation Protocol (SIP) Configuration:

DHCP or STATIC IP address provisioning.



RoHS



N30788

Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au